


1	2	3	4	5	6	7	8	9	10
SWITCH CIRCUIT			MATERIAL AND FINISH AS BELOW						
WHEN CARD IS EJECTED		WHEN CARD IS INSERTED		A	Housing	LCP UL94V-0, Color:Ivory	E		
				B	Contact	Brass C2680, Gold Plated Over Nickel	F		
				C	Holddown	Brass C2680, Tin Plated	G		
				D			H		

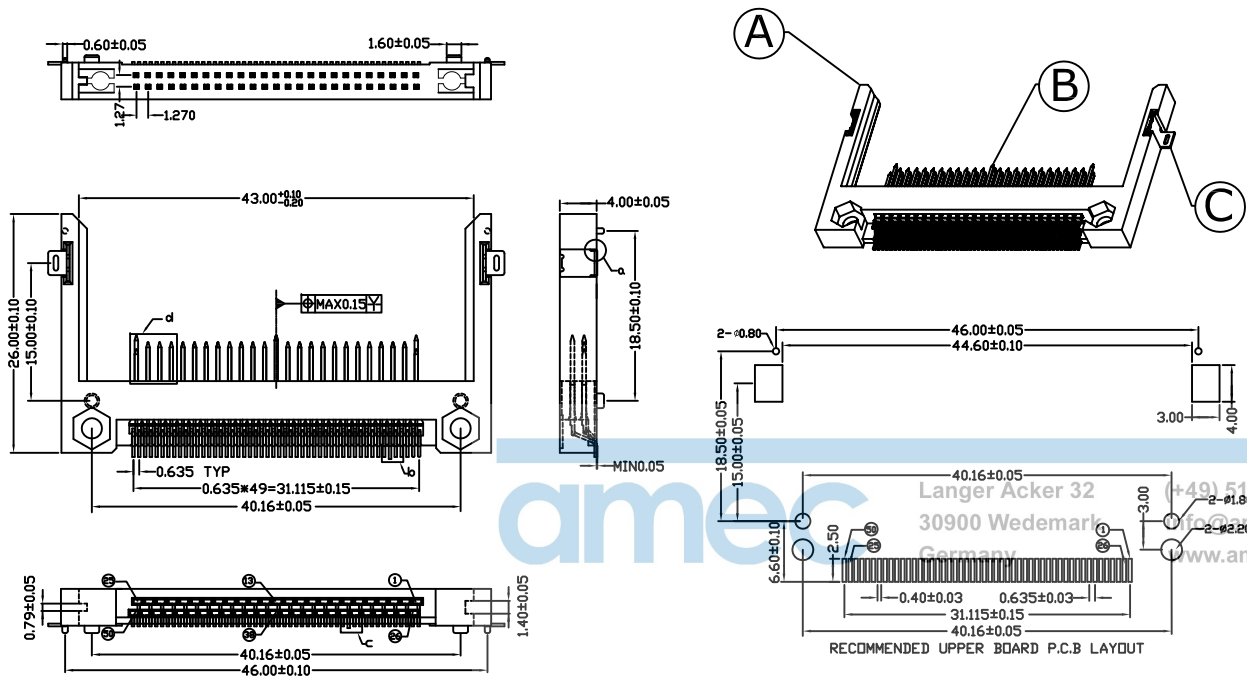





**SPECIFICATION:**

- ELECTRICAL**
  - Current Rating: 0.5AMP
  - Voltage Rating: 100VAC
  - Contact Resistance: 40mΩ
  - Insulation Resistance: 1000MΩ
  - Dielectric Withstanding Voltage: 500VAC for 1 minute

- MECHANICAL**
  - Durability: 10000Cycle
  - Insertion Force: 28.8N
  - Extraction Force: 4.9N

- ENVIRONMENTAL**
  - Operating temperature range: -40°C to +85°
  - Storage temperature range: -40°C to +85°

- SOLDER ABILITY**
  - Recommended IR Reflow Temperature: 260°C 10Sec



PIN NUMBER	DIML
25 26	3.50
ALL OTHER PINS	4.25
1 13 38 50	5.00

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
----	----	----	----	----	----	----	----	----	-----	-----	-----

**PIN ASSIGNMENT**

101D-TAAA-R01	CF Socket Slim Type Peg:40.16,Contact Area:Gold Flash
PRODUCT NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/11/13
CHECKED	Angel	2012/11/13
APPROVED	Ken	2012/11/13



www.attend.com.tw

DRAWN NAME: CF Slim Type Socket Locating Peg:40.16

PRODUCT NO. 101D-TAAA-R01

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		
4			7		
5			8		
6			9		
7			10		

- Revise:
- Revise:
- Revise:



SIZE A4 REV. 1.0

FILE NAME 101D-TAAA-R01\_B\_1